

# IT65

## Small Rigid Tag

Durable Passive UHF RFID Tag



- Rugged encapsulation for harsh environments
- Consistent range performance worldwide
- EPCglobal Class-1, Generation-2 (Gen 2)
- Superior performance on a variety of materials
- Reusable for lower cost per use
- RoHS and WEE compliant

Intermec's IT65 Small Rigid Tag (SRT) is an EPCglobal Gen 2 passive UHF RFID transponder that delivers superior performance on a variety of surfaces including plastic, wood and metal. The tag is designed to support a global UHF frequency band, which enables it to be used virtually anywhere in the world while maintaining superior read range performance.

The tag's rugged, compact package is designed for harsh environments with temperatures ranging from -40° to 250° F (-40° to +121° C). The robust physical package is designed for exposure to substances and chemicals representative of typical industrial applications, including machining oil, gasoline, motor oil, methyl ethyl ketone (MEK), isopropyl alcohol, methyl alcohol, mineral spirits, acetone, and kerosene.

The IT65 Small Rigid Tag is ideal for industrial applications where ruggedness, chemical resistance or higher temperature ratings are required and where tag size is an important consideration.

#### Typical applications include:

- Reusable Plastic Containers (RPCs)
- Unit Loading Devices (ULDs)
- Metal and plastic pallets
- Metal cages
- Metal cylinders
- Beverage containers
- Hazardous material containers
- Chemical containers

#### Attachment Methods

The tags can be attached using screws, rivets, double-sided adhesive strips, or a variety of other methods appropriate for the application. Each tag has two mounting holes for up to #6 hardware (not included).

#### Reader Compatibility

Intermec manufactures a complete line of readers that are compatible with the IT65 Small Rigid Tag, including:

- IF2 Network Reader
- IF61 Enterprise Reader
- IP30 Handheld Reader
- IV7 Vehicle Mount Reader

The IT65 tag is also compatible with competitive readers operating under the established EPCglobal Gen 2 protocol standard

### Air Interface

EPCglobal Class-1, Generation-2 (Gen 2)

### Silicon Type

Impinj Monza 1a  
96 bit EPC code, unprogrammed

### Operating Frequency

UHF global 860 - 960 MHz

### Temperature Range

-40°F to 250°F (-40°C to 121°C)

### Chemical Resistance


- Machining oil and fluid
- Gasoline
- Motor oil
- Methyl Ethyl Ketone (MEK)
- Isopropyl alcohol
- Methyl alcohol
- Mineral spirits
- Acetone
- Kerosene

### Size


Length: 79 mm (3.11")

Width: 31 mm (1.22")

Thickness: 10.2 mm (0.41")

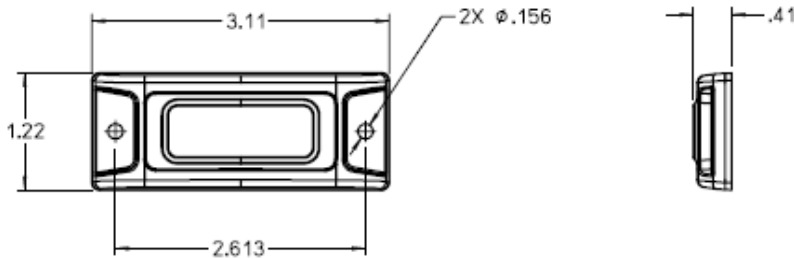

### Read Range Performance of Gen 2/18000-6C Small Rigid Tag

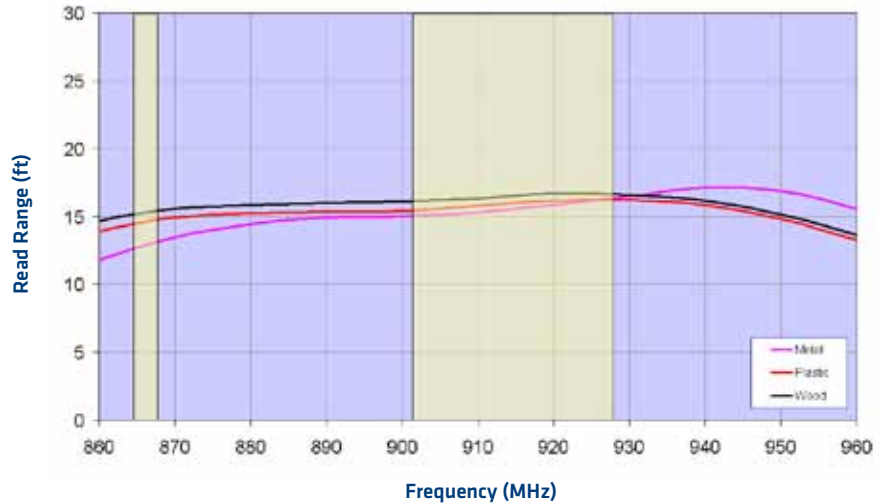

### Note

Actual range performance may vary depending on reader power output, temperature, and other environmental factors.

#### North America

##### Corporate Headquarters

6001 36th Avenue West  
Everett, Washington 98203  
Phone: (425) 348-2600  
Fax: (425) 355-9551

##### North Latin America

##### Headquarters Office

Mexico  
Phone: +52 55 52-41-48-00  
Fax: +52 55 52-11-81-21

#### South Latin America

##### Headquarters Office

Brazil  
Phone: +55 11 3711-6776  
Fax: +55 11 5502-6780

#### Europe/Middle East & Africa

##### Headquarters Office

Reading, United Kingdom  
Phone: +44 118 923 0800  
Fax: +44 118 923 0801

#### Asia Pacific

##### Headquarters Office

Singapore  
Phone: +65 6303 2100  
Fax: +65 6303 2199

#### Internet

www.intermec.com  
Worldwide Locations:  
www.intermec.com/locations

#### Sales

Toll Free NA: (800) 934-3163  
Toll in NA: (425) 348-2726  
Freephone ROW:  
00 800 4488 8844  
Toll ROW: +44 134 435 0296

#### OEM Sales

Phone: (425) 348-2762

#### Media Sales

Phone: (513) 874-5882

#### Customer Service and Support

Toll Free NA: (800) 755-5505  
Toll in NA: (425) 356-1799



Copyright © 2011 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611752-01D 12/11

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

